

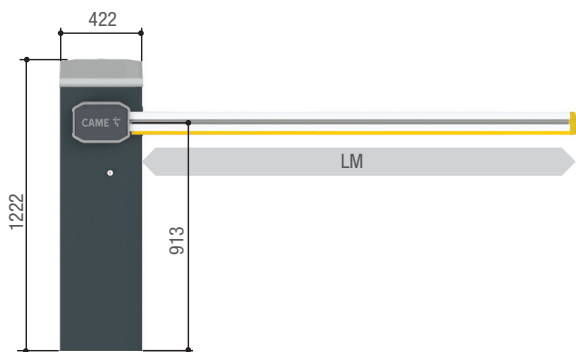


GARD GT4 DIMENSIONS



LM = Max. net clearance width

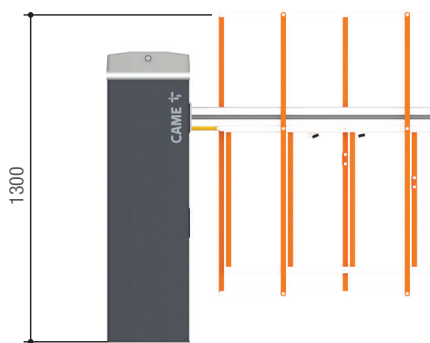

PASSAGE WIDTH CLEARANCE
from 2.5 to 4 metres

MCBF
3 million cycles

Tested for intensive use up to
350 CYCLES/hour.

TECHNICAL SPECIFICATIONS

OPERATIONAL LIMITS

MODELS	803BB-0160	803BB-0280	803BB-0240	803BB-0260
Max. net clearance width (m)			4	

TECHNICAL FEATURES

MODELS	803BB-0160	803BB-0280	803BB-0240	803BB-0260
Cabinet material	STEEL	STEEL	AISI 304 STAINLESS STEEL	AISI 316 STAINLESS STEEL
RAL colour	7024	CUSTOM	-	-
Protection rating (IP)			54	
Power supply (V - 50/60 Hz)			230 AC	
Motor power supply (V)			24 DC	
Max current draw (mA)			1.1	
Stand-by consumption (W)			7	
Power (W)			240	
Torque (Nm)			300	
Opening time at 90° (s)			2 to 6	
Cycles/hour			350	
Operating temperature (°C)			-20 ÷ +55	

● 24 V DC