
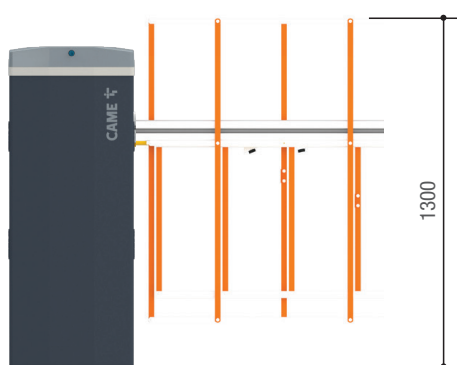


GARD GT8 DIMENSIONS

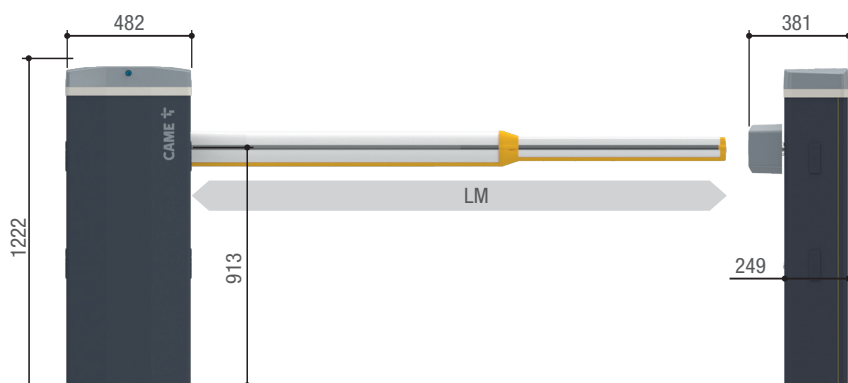

PASSAGE WIDTH CLEARANCE
from 4 to 7.8 metres

MCBF
3 million cycles

Tested for intensive use up to
160 CYCLES/hour.

TECHNICAL SPECIFICATIONS

BOOM SELECTION

LATERAL CLEARANCE WIDTH (m)	< 4	4 to 6	> 6
Type of boom	803XA-0400	803XA-0410	803XA-0420
Skirt compatibility	803XA-350 - 803XA-0340	803XA-350 - 803XA-0340	803XA-0340
Detachable attachment	803XA-0390	803XA-0390	803XA-0390

OPERATIONAL LIMITS

MODELS	803BB-0180	803BB-0290	803BB-0250	803BB-0270
Max. net clearance width (m)			7.8	

TECHNICAL FEATURES

MODELS	803BB-0180	803BB-0290	803BB-0250	803BB-0270
Protection rating (IP)			54	
Power supply (V - 50/60 Hz)			230 AC	
Motor power supply (V)			24 DC	
Max current draw (mA)			1.1	
Stand-by consumption (W)			7	
Power (W)			240	
Torque (Nm)			600	
Opening time at 90° (s)			4 to 8	
Cycles/hour			160	
Operating temperature (°C)			-20 to +55	
RAL colour	7024	CUSTOMISED	-	-
Cabinet material	STEEL	STEEL	STAINLESS STEEL AISI 304	STAINLESS STEEL AISI 316

● 24 V DC